

2 Component Polyurethane Adhesive Sealant For Window Corner Angle Frame Assembly

Our Product Introduction

Basic Information

- Place of Origin: China
- Brand Name: XuanQing
- Model Number: Cotoo 1
- Minimum Order Quantity: 500PCS
- Price: Negotiable
- Packaging Details: Carton Box
- Delivery Time: 10-15 work days
- Payment Terms: TT
- Supply Ability: 3000000pcs/mon



Product Specification

- Warranty: 1 Year
- After-sale Service: Online Technical Support, Onsite Training
- Project Solution Capability: Total Solution For Projects
- Application: Apartment, Door Window Manufacture
- Design Style: Traditional
- Type: Corner Angle Double Components Adhesives, Polyurethane Adhesive
- Product Name: Corner Angle Adhesive
- Usage: Construction
- Classification: Double Components Adhesives
- Function: Room Curing
- Morphology: Solvent Free
- Material: Polyurethane
- Characteristic: Waterproof
- Color: Light Yellow



Product Description

2 Component Polyurethane Adhesive Sealant For Window Corner Angle Frame Assembly

Product Specifications

Attribute	Value
Warranty	1 Year
After-sale Service	Online technical support, Onsite Training
Project Solution Capability	Total solution for projects
Application	Apartment, Door Window Manufacture
Type	Corner Angle Double Components Adhesives, polyurethane adhesive
Classification	Double Components Adhesives
Function	Room Curing
Material	Polyurethane
Characteristic	Waterproof
Color	Light Yellow

Product Description

This two-component polyurethane adhesive sealant is specifically designed for corner angle frame assembly of windows and doors. It provides a strong and durable bond, ensuring the stability and integrity of the frame.

Key Features

- Specially formulated for window and door frame assembly
- Creates strong, durable bonds for structural integrity
- Waterproof polyurethane composition
- Light yellow color for discreet application
- Room temperature curing process

Application Instructions

- Ensure substrates are clean before application
- Insert cartridge into manual or pneumatic applicator gun
- Remove stopper and attach extrusion-type nozzle
- Cut nozzle to required shape and size
- Discard first 20cm of sealant before application
- Apply to substrates or sealing area

Note: Replace mixing head if sealant application is paused for more than 20 minutes.

Product Images

TEST REPORT

No. : GZMR230400940201

Date : Apr 21, 2023

Page: 4 of 4



Equipment Information:

Equipment	Model	Equipment No.	Calibration date	Next Calibration date
Universal Testing Machine	Z030	GZMR-PL-E140	2022-06-21	2023-06-20

***** End of report*****

TEST REPORT

No. : GZMR230400940201

Date : Apr 21, 2023

Page: 3 of 4

Test Item: Tensile Lap-Shear Strength

Sample Description: Adherend

Test Method: ISO 4587:2003

Test Condition:

Shear area: $25.2 \times 14.3 \text{ mm}^2$

Testing speed: 9.0MPa/min

Number of specimens tested: 5


Lab Environmental Condition: $23 \pm 2^\circ\text{C}$, $50 \pm 5\% \text{ RH}$

Test Result:

Test Item	Test Result
Tensile Lap-Shear Strength	19.6MPa

Note: Failure mode: Cohesion failure.

Test Photo:

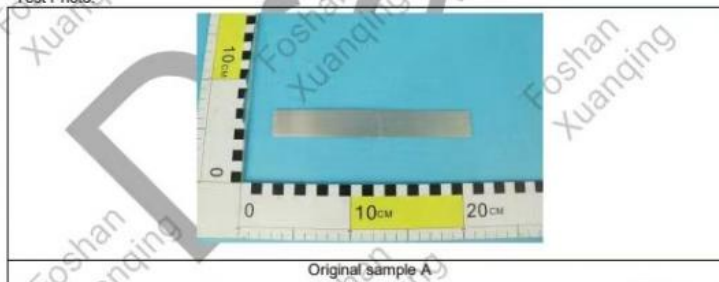

TEST REPORT

No. : GZMR230400940201

Date : Apr 21, 2023

Page: 2 of 4

Summary of Results:

No.	Test Item	Test Method	Result	Conclusion
1	Tensile Lap-Shear Strength	ISO 4587:2003	19.6MPa	/

Note:

Pass : Meet the requirements;

Fail : Does not meet the requirements;

/ : Not Apply to the judgment.



Test Report

No. SZXEC2202967905

Date: 06 Sep 2022

Page 6 of 6

Sample photo:



SGS authenticate the photo on original report only

*** End of Report ***


Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and limitation of time defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced, except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.

Attention: To check the authenticity of testing (inspection) report & certificate, please contact us at telephone +86 21 5352 1424, or email: CN.Direct@sgs.com

SGS (Shanghai) Inspection & Testing Services Co., Ltd.
Room 101-102, Part A, Floor 10, Part C, Room 101-102, Part C, Jinqiao Software Park, No. 48, Jinqiao Road, Pudong District, Shanghai, China 200120
中国·广东·深圳前海深港现代服务业合作区前湾一路1号A栋101-102、2号101、3号101-102 邮编 518127 1 86-21 5352 1424 www.sgs.com.cn sgs.cn@sgs.com

Member of the SGS Group (SGS SA)

Phthalates Testing Flow Chart

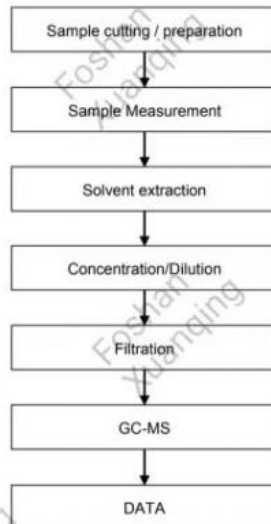

955-Cilva, Inc. and Tech. Serv. Co. Ltd.
P.O. Box 100, 10000, 10000

[illegible]



Manufacturer Information

Foshan Xuanqing Door and Window Accessories Co., Ltd. specializes in door and window accessories including aluminum corner code customization. As an innovative technology enterprise, we offer comprehensive solutions from research and development to manufacturing and sales.

Our product range includes various injection corner codes, anti-fall devices, elevators, hinges, and curtain wall pendants. With over twenty patented products meeting national standards, we serve both domestic and international markets including Europe and America.



SOME HONORS



宣清智连科技
Xuanqing Zhilian Technology

Foshan Xuanqing Zhilian Technology Co., LTD



+8613827792344



fsxuanqing@gmail.com



aluminium-hardware.com

Guangdong Foshan Nanhai No. 5-1, Songgang Lianbiao Industrial Zone, Shishan Town